

Junction box


Height 112 mm, screw c/c distance 67 mm

Type: AUB67H

GTIN: 6438199008837



Junction box AUB67H is especially designed for off site and on site casting applications. Box height is 112 mm. Box has several fixed inlets with locking springs to two directions (4 x 20 mm and 4 x 25 mm). Two 25 mm inlets have removable 20 mm reducer. It is possible to connect four 20 mm conduits simultaneously to one direction. The mounting box includes a rotating installation ring, has large inside space and removable back cover. Made of halogen free material (IEC/61249-2-21) and fulfills the requirements of the glow wire test according to the standard IEC/EN60670: 2005 (650 °C). Maximum number of conductors is 40 pcs.

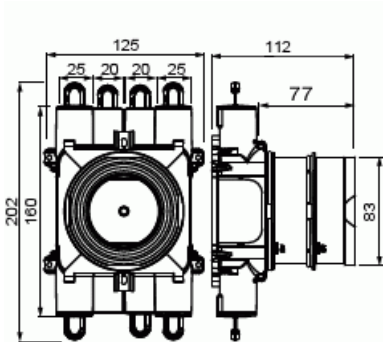

Technical specification

General Information

| | |
|-------------|--------------|
| Product ID: | 2TKA00004648 |
|-------------|--------------|

Thermal conditions

| | |
|------------------------|---------------|
| Operating temperature: | -25 ... 90 °C |
|------------------------|---------------|

Packing

| | |
|----------|-----|
| Package: | 24 |
| Unit: | PCS |

ETIM Data

| | |
|--|-------------------------------|
| Mounting method: | Concrete building |
| Shape: | Round |
| Construction type: | Cable junction box |
| Model: | Single |
| Provided with revolving ring: | Yes |
| Connectable: | Yes |
| Equipped with: | None |
| Length: | 200 mm |
| Width: | 125 mm |
| Depth: | 200 mm |
| Inner depth: | 107 mm |
| For number of electric fittings: | 1 |
| Mounting switching equipment: | Screwing |
| With screws: | Yes |
| Housing feed-through by break-out opening: | Yes |
| Housing feed-through by seal membrane: | No |
| Housing feed-through by nozzle: | Yes |
| Housing feed-through by step membrane: | No |
| For tube diameter: | 20/25 mm |
| Pipe locking: | Yes |
| Pipe locking optional: | No |
| Inlet from the rear: | No |
| Number of inlets: | 8 |
| Number of included spouts: | 8 |
| Material: | Plastic |
| Halogen free: | Yes |
| Surface protection: | Untreated |
| Colour: | White |
| Degree of protection (IP): | IP3X |
| Cover model: | Construction protective cover |
| Transparent cover: | No |
| Cover attachment: | Snapped on |

Product Card

Height 112 mm, screw c/c distance 67 mm



| | |
|--------------------------|------|
| Sealable: | No |
| With screening: | No |
| Air tight: | No |
| Clamp position fixed: | No |
| Luminaire hook mounting: | No |
| Special application: | None |