

Socket outlet


Single socket outlet with residual current device

Type: 3120EUC-916

Product ID: 2CCG001361R0001

GTIN: 7612271518301

Shuttered. DP cut off (P,N) Without PE monitoring. With connecting conductor and protection of downstream socket outlets. Rated actuating current: 30 mA. Release time: ≤ 30 ms. Short-circuit strength: 3000 A (with 25 A GL fuse). Current surge strength: 250 A (8/20) μ s. With fixing claws. Rated frequency: 45-60 Hz.

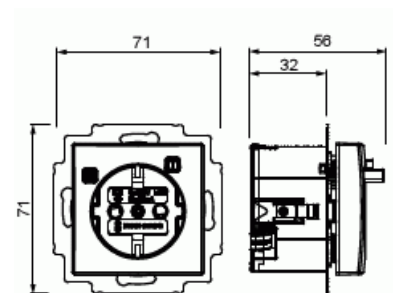

Technical specification

Packing

Package:	1/1
Unit:	PCS

ETIM Data

Number of active pins (round):	2
With signal lamp:	No
Number of units:	1
Number of phases:	1
Imprint/indication:	None
Connection type:	Push-in clamp
With hinged lid:	No

Product Card

Single socket outlet with residual current device



With enhanced contact protection:	No
Label space/information surface:	No
Colour:	White
RAL-number (similar):	9003
Metallic colour:	No
Transparent:	No
Lockable:	No
Eject-mechanism:	No
Insulated mounting:	No
With function lighting:	No
With orientation lighting:	No
Over voltage protection:	No
Fault current protection:	No
With miniature fuse:	No
Special power supply:	No special power supply
Mounting method:	Flush mounted (plaster)
Type of fastening:	Mounting with claw and screw
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Yes
Surface protection:	Untreated
Surface finishing:	Glossy
Anti-bacterial treatment:	No
With loop through function:	No
With on/off switch:	No
Rotated central insert:	No
Nominal current:	16 A
Nominal voltage:	250 V
Frequency:	50...60 Hz
Rated fault current:	30 mA
Suitable for degree of protection (IP):	IP21
Device width:	71 mm
Device height:	71 mm
Device depth:	56 mm

Product Card

Single socket outlet with residual current device



—
© ABB 2024

Business ID 0763403-0

www.installationmaterials.com

—
Customer service

puh. +358 10 222 1999

contact.center@fi.abb.com

—
ABB Exchange

+358 10 22 11