

Product Card

Residual current device, 1-gang



Socket outlet

Residual current device, 1-gang


Type: 3150UC-916.1

Product ID: 2CCG001362R0001

GTIN: 7612271518318

IP21

Protection of downstream consumers. Rated actuating current: 30 mA. Release time: ≤ 30 ms. Short-circuit strength: 3000 A (with 25 A GL fuse). Current surge strength: 250 A (8/20) μ s. Without claw fixation. Rated frequency: 45-60 Hz.

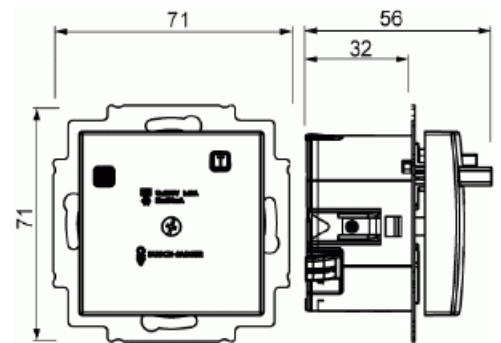

Technical specification

Packing

| | |
|----------|-----|
| Package: | 1/1 |
| Unit: | PCS |

ETIM Data

| | |
|----------------------------|----------|
| ETIM Version: | ETIM-9.0 |
| ETIM Class: | EC000003 |
| Rated current: | 16 A |
| Rated fault current: | 0.03 A |
| Mounting method: | Other |
| Degree of protection (IP): | IP21 |
| RAL-number (similar): | 9003 |