

Product Card

Blind control II cut-off relay DC drives



Relay

Blind control II cut-off relay DC drives

Type: 6415/24

Product ID: 2CKA006410A0363

GTIN: 4011395019672



For jointly switching 2 blind drives via a 230 V contact maker (UP/DOWN) (e.g. 6411 U/x-101).

For grouping more than 2 blinds, several cut-off relays can be controlled parallel.

For installation in commercially available SM-or flush mounted boxes.

The device requires an external supply voltage of 12-48 V DC.


Rated voltage: 230 V~, +10 % / -10 %

Rated frequency: 50 Hz

Outputs: 2 Normally open contact

Rated current: 3 A

Temperature range (Device): -25 °C to 50 °C

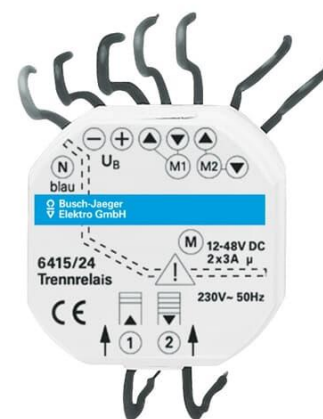

Technical specification

Packing

Package:	1/10
Unit:	PCS

ETIM Data

Central input:	Yes
Number of connectable motors:	2
Nominal voltage:	230 V

© ABB 2024

Business ID 0763403-0

www.installationmaterials.com

Customer service

puh. +358 10 222 1999

contact.center@fi.abb.com

ABB Exchange

+358 10 22 11

Product Card

Blind control II cut-off relay DC drives



Rated current:

3 A
