

## Product Card

Blind control II cut-off relay DC drives



# Relay

Blind control II cut-off relay DC drives

**Type:** 6415/24

**Product ID:** 2CKA006410A0363

**GTIN:** 4011395019672



For jointly switching 2 blind drives via a 230 V contact maker (UP/DOWN) (e.g. 6411 U/x-101).

For grouping more than 2 blinds, several cut-off relays can be controlled parallel.

For installation in commercially available SM-or flush mounted boxes.

The device requires an external supply voltage of 12-48 V DC.


Rated voltage: 230 V~, +10 % / -10 %

Rated frequency: 50 Hz

Outputs: 2 Normally open contact

Rated current: 3 A

Temperature range (Device): -25 °C to 50 °C

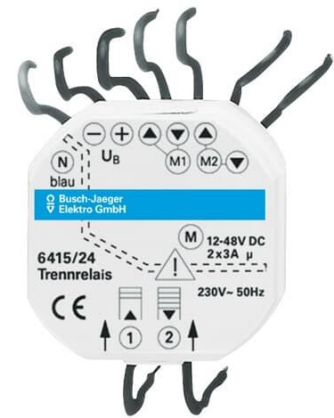

## Technical specification

### Packing

Package:	1/10
Unit:	PCS

### ETIM Data

Central input:	Yes
Number of connectable motors:	2
Rated current:	3 A

© ABB 2024

Business ID 0763403-0

[www.installationmaterials.com](http://www.installationmaterials.com)

**Customer service**

puh. +358 10 222 1999

[contact.center@fi.abb.com](mailto:contact.center@fi.abb.com)

**ABB Exchange**

+358 10 22 11

# Product Card

Blind control II cut-off relay DC drives



---

—  
© ABB 2024

Business ID 0763403-0

[www.installationmaterials.com](http://www.installationmaterials.com)

---

—  
Customer service

puh. +358 10 222 1999

[contact.center@fi.abb.com](mailto:contact.center@fi.abb.com)

---

—  
ABB Exchange

+358 10 22 11