


Renovation 1,5 box

Mounting box for flat socket outlet

Type: AUS90

Product ID: 2TKA00002897

GTIN: 6438199004563

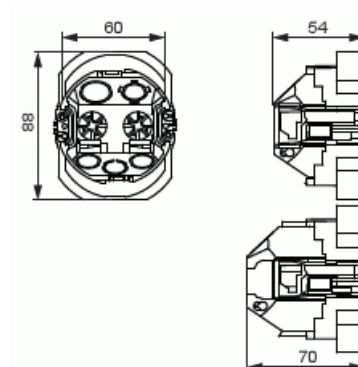

The AUS90 is a front-mounted mounting box for flat socket outlet (for example 302EUJT) with telescope bottom part for board walls of 1 – 3 gypsum boards (thickness of the wall 9 – 39 mm). The height of the box is 54 – 70 mm thanks to the moving bottom part. The installation hole diameter is 73 X 90 mm (box drill AT4). At the side of the bottom part are three inlets for the 16 mm flexi pipe. There is also one inlet for the 16/20 mm and one inlet for the 20 mm flexi pipe.). There are two inlets with strain reliefs on the bottom of the box for installing 8 - 13 mm cables and two inlets for the low voltage cables. The box has four openings, one on each side, through which conductors can also be conveyed from one box to another. At the top of the box there are two fixing places for screws to install it to the log wall. At the bottom there are marking holes for drilling the installation holes overlapping each other. The protection class is IP3X. Made of halogen free material (IEC/61249-2-21) and fulfills the requirements of the glow wire test according to the standard IEC/EN60670: 2005 (850 °C).

Technical specification

Packing

| | |
|----------|-----|
| Package: | 50 |
| Unit: | PCS |

ETIM Data

| | |
|------------------|-------------------------|
| Mounting method: | Flush mounted (plaster) |
|------------------|-------------------------|

Product Card

Mounting box for flat socket outlet



| | |
|--|--------------------------------------|
| Shape: | Round |
| Construction type: | Device connection box (round/square) |
| Model: | One and a half |
| Provided with revolving ring: | No |
| Connectable: | Yes |
| Equipped with: | None |
| Length: | 88 mm |
| Width: | 73 mm |
| Depth: | 88 mm |
| Inner depth: | 52 mm |
| For number of electric fittings: | 1 |
| Mounting switching equipment: | Screwing |
| With screws: | Yes |
| Housing feed-through by break-out opening: | Yes |
| Housing feed-through by seal membrane: | No |
| Housing feed-through by nozzle: | No |
| Housing feed-through by step membrane: | No |
| For tube diameter: | 16 mm |
| Suitable for cable diameter: | 8...13 mm |
| Pipe locking: | Yes |
| Pipe locking optional: | No |
| Inlet from the rear: | No |
| Material: | Plastic |
| Halogen free: | Yes |
| Surface protection: | Untreated |
| Colour: | White |
| Degree of protection (IP): | IP3X |
| Transparent cover: | No |
| Sealable: | No |
| With screening: | No |
| Air tight: | No |
| Clamp position fixed: | No |
| Luminaire hook mounting: | No |

Product Card

Mounting box for flat socket outlet



Special application:

None