

## Product Card

Socket outlet, Jussi, Schuko, 4-gang, shuttered, screwless terminals



# Socket outlet

Socket outlet, Jussi, Schuko, 4-gang, shuttered, screwless terminals


**Type:** 404EA

**Product ID:** 2TKA001001G1

**GTIN:** 6418677335822



There is 2 times 2-gang socket outlet inserts in one unit. The socket outlet inserts are internally connected. In one socket outlet insert there are terminals for each contact of the socket outlet for max 4 rigid wires. No X-terminals.

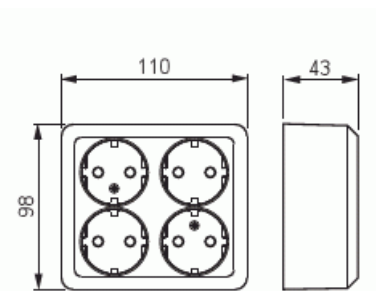

## Technical specification

### Electrical quantities

Rated current:	16 A
Rated voltage:	250 V

### Classification

Enclosure class:	IP21
------------------	------

### Packing

Package:	1/20
Unit:	PCS

### ETIM Data

© ABB 2024

Business ID 0763403-0

[www.installationmaterials.com](http://www.installationmaterials.com)

Customer service

puh. +358 10 222 1999

[contact.center@fi.abb.com](mailto:contact.center@fi.abb.com)

ABB Exchange

+358 10 22 11

# Product Card

Socket outlet, Jussi, Schuko, 4-gang, shuttered, screwless terminals



Number of active pins (round):	2
With signal lamp:	No
Number of units:	4
Number of phases:	1
Imprint/indication:	None
Connection type:	Push-in clamp
With hinged lid:	No
With enhanced contact protection:	Yes
Label space/information surface:	No
Colour:	White
RAL-number (similar):	9010
Metallic colour:	No
Transparent:	No
Lockable:	No
Eject-mechanism:	No
Insulated mounting:	No
With function lighting:	No
With orientation lighting:	No
Over voltage protection:	No
Fault current protection:	No
With miniature fuse:	No
Special power supply:	No special power supply
Mounting method:	Surface mounted (plaster)
Type of fastening:	Mounting with screw
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Yes
Surface protection:	Untreated
Surface finishing:	Glossy
Anti-bacterial treatment:	No
With loop through function:	No
With on/off switch:	No
Rotated central insert:	No
Nominal current:	16 A

# Product Card

Socket outlet, Jussi, Schuko, 4-gang, shuttered, screwless terminals



Nominal voltage:	250 V
Frequency:	50 Hz
Suitable for degree of protection (IP):	IP21
Device width:	110 mm
Device height:	42 mm
Device depth:	98 mm