

Product Card

Watchdog receiver, RF, 230V, 10AX




Watchdog

Watchdog receiver, RF, 230V, 10AX

Type: 6701-101-500

Product ID: 2CKA006700A0040

GTIN: 4011395182642

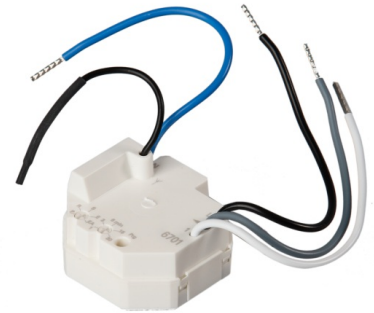

230 V, 16 A relay, IP55, for surface mounting. Detection area 220 degrees - the sensor section can be tilted down and rotated horizontally. Detection range 16 m to the front and sides when mounted at a height of 2.5 m. Adjustable lighting level 0.5-1,000 lux, switch-off delay 2 sec-30 min.

Technical specification

Electrical quantities

Rated voltage:	230 V
Power ratio (cos ϕ):	0.6
Switching current:	≤ 10 AX

Classification

Suitable for degree of protection (IP):	IP20
---	------

Dimensions

Dimensions:	30x47x48 mm
Weight:	48 g

Product Card

Watchdog receiver, RF, 230V, 10AX



Thermal conditions

Operating temperature:	-5 ... 40 °C
------------------------	--------------

Colors

Colour:	White
---------	-------

Electronics

Operating frequency:	868 MHz
Switching time:	60 sek - 30 min

Packing

Package:	1/10
Unit:	PCS

ETIM Data

Suitable for dimmer:	No
Suitable for pulse button:	Yes
Suitable for roller shutter switch:	No
Suitable for venetian shutter switch:	No
Suitable for venetian-/roller shutter switch:	No
Suitable for switch:	Yes
In housing:	Yes
In tube base housing:	No
Printed circuit board/module:	No
Current supply:	230 V AC
Push button mode:	Yes
Switching mode:	Yes
With manual radio transmitter:	No
With radio coding device:	No
With radio controlled push button:	No
Number of relays:	1
Mounting method:	Flush mounted (plaster)

Product Card

Watchdog receiver, RF, 230V, 10AX



Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Yes
Surface protection:	Untreated
Surface finishing:	Matt
Type of fastening:	Clamp mounting
Colour:	White
Transparent:	No
Rolling code system:	No
Code length (Bit):	8
Number of commands:	3
Compatible with Apple HomeKit:	No
Compatible with Google Assistant:	No
Compatible with Amazon Alexa:	No
IFTTT support available:	No